



IMRO a fresh future for you



Plug-In Series;

No extra installation cost

Low operating costs

Low investment



APPLE SERIES



*Double Tempered
LowE Curved Glass*

Aluminium Frame

*Full set shelves
included*



Bumpers

*Digital
Thermostat*

*Wheels &
Adjustable leg*


*HFC Free
Polyurethane*










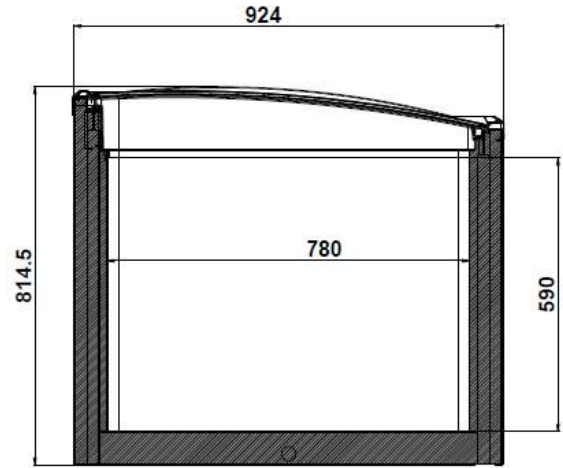

APPLE 150




- Temperature Range	NTS: -18/-23 C° - PTS: -1/+5 C°
- External Dimensions (WxDxH)	1508*932*894
- Internal Dimensions (WXDXH)	1360* 780 * 590
- Packed Dimensions (WXDXH)	1615* 1035 * 940
- Net Volume (Lt)	488
- Gross Volume (Lt)	667
- Product Projection Area (m²)	1,40 m²
Net Weight (kg)	122
Gross Weight (kg)	145
- Refrigerant Gass	R404 / R290(OPT)
- Voltage / Frequency	220 V / 50-60 Hz
- Thermostat Type	ELEKTRONİK / ELEKTRONIC
- Frame Resistance	HOT GASS
Defrost	OPSİYONEL / OPTIONAL
Adjustable Leg	x4
- Internal Lightening	LED
- Cabinet Outer Sheet	Galvanized & Pre-painted Metal Sheet
- Cabinet Inner Sheet	Galvanized & Pre-painted Metal Sheet
- Insulation Material	Poliüretan / Polyurethane
- PU Thickness	72 mm

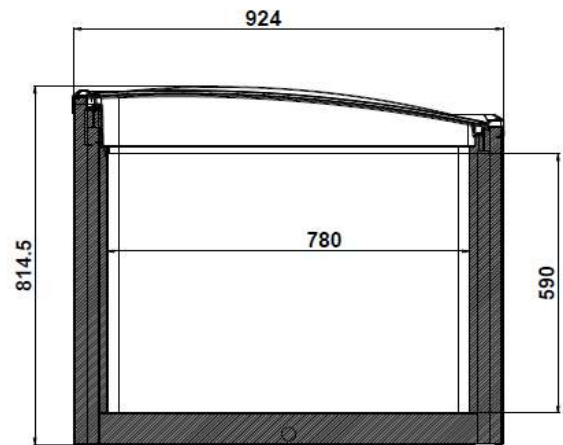

APPLE 188




- Temperature Range	NTS: -18/-23 C° - PTS: -1/+5 C°
- External Dimensions (WXDXH)	1879 * 932 * 894
- Internal Dimensions (WXDXH)	1731 * 780 * 590
- Packed Dimensions (WXDXH)	1986 * 1035 * 940
- Net Volume (Lt)	643
- Gross Volume (Lt)	870
- Product food Area (m²)	1,74 m²
- Net Weight (kg)	134
- Gross Weight (kg)	157
- Refrigerant Gass	R404 / R290(OPT)
- Voltage / Frequency	220 V / 50-60 Hz
- Thermostat Type	ELEKTRONIC
- Frame Resistance	HOT GASS
- Defrost	OPTIONAL
- Adjustable Leg	x4
- Internal Lightening	LED
- Cabinet Outer Sheet Type	Galvanized & Pre-painted Metal Sheet
- Cabinet Inner sheet type	Galvanized & Pre-painted Metal Sheet
- Insulation Material	Polyurethane
- PU Thickness	72 mm

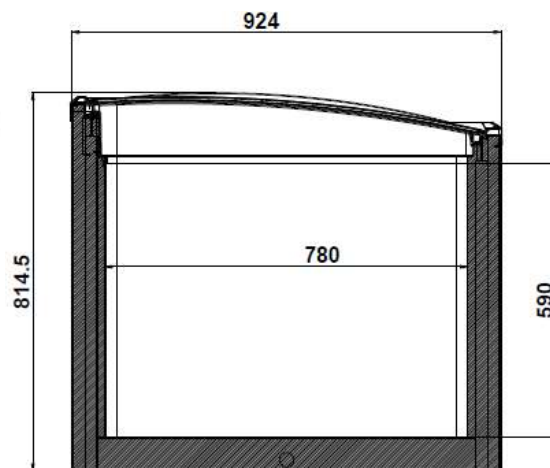

APPLE 212




- Temperature Range	NTS: -18/-23 C° - PTS: -1/+5 C°
- External Dimensions (WXDXH)	2124*932*894
- Internal Dimensions (WXDXH)	1976 * 780 * 590
- External Dimensions with Package (WXDXH)	2231 * 1035 * 940
- Net Volume (Lt)	745
- Gross Volume (Lt)	1005
- Product food Area (m²)	1,97 m²
- Net Weight (kg)	139
- Gross Weight (kg)	162
- Refrigerant Gass	R404 / R290(OPT)
- Voltage / Frequency	220 V / 50-60 Hz
- Thermostat Type	ELEKTRONIC
- Frame Resistance	HOT GASS
- Defrost	OPTIONAL
- Adjustable Leg	x4
- Internal Lightening	LED
- Cabinet Outer Sheet Type	Galvanized & Pre-painted Metal Sheet
- Cabinet Inner sheet type	Galvanized & Pre-painted Metal Sheet
- Insulation Material	Polyurethane
- PU Thickness	72 mm

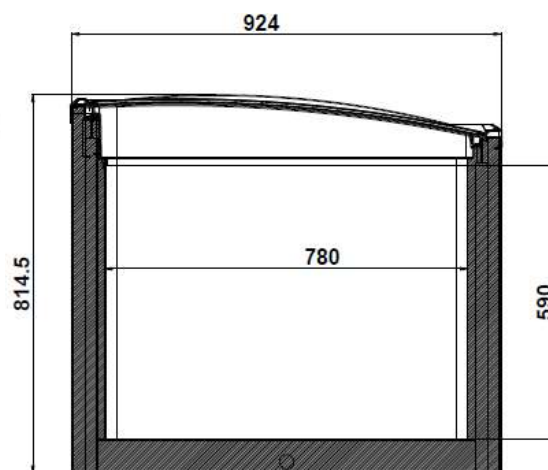

APPLE 250




- Temperature Range	NTS: -18/-23 C° - PTS: -1/+5 C°
- External Dimensions (WXDXH)	2508*932*894
- Internal Dimensions (WXDXH)	2360 * 780 * 590
- Packed Dimensions (WXDXH)	2615 * 1035 * 940
- Net Volume (Lt)	905
- Gross Volume (Lt)	1216
- Product food Area (m²)	2,33 m²
- Net Weight (kg)	152
- Gross Weight (kg)	175
- Refrigerant Gass	R404 / R290(OPT)
- Voltage / Frequency	220 V / 50-60 Hz
- Thermostat Type	ELEKTRONIC
- Frame Resistance	HOT GASS
- Defrost	OPTIONAL
- Adjustable Leg	x4
- Internal Lightening	LED
Cabinet Outer Sheet Type	Galvanized & Pre-painted Metal Sheet
- Cabinet Inner sheet type	Galvanized & Pre-painted Metal Sheet
- Insulation Material	Polyurethane
- PU Thickness	72 mm

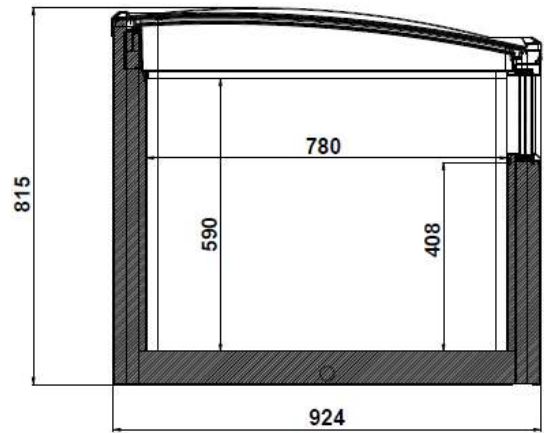

APPLE FG




- Temperature Range	NTS: -18/-23 C°
- External Dimensions (WXDXH)	2008*932*894
- Internal Dimensions (WXDXH)	1860 * 780 * 590
- External Dimensions with Package (WXDXH)	2115 * 1035 * 940
- Net Volume (Lt)	512
- Gross Volume (Lt)	941
- Product food Area (m²)	1,87 m²
- Net Weight (kg)	144
- Gross Weight (kg)	166
- Refrigerant Gass	R404 / R290(OPT)
- Voltage / Frequency	220 V / 50-60 Hz
- Thermostat Type	ELEKTRONIC
- Frame Resistance	HOT GASS
- Defrost	OPTIONAL
- Adjustable Leg	YES 4 PCS
- Internal Illumination	LED
- Cabinet Outer Sheet Type	Galvanized & Pre-painted Metal Sheet
- Cabinet Inner sheet type	Galvanized & Pre-painted Metal Sheet
- Insulation Material	Polyurethane
- PU Thickness	72 mm

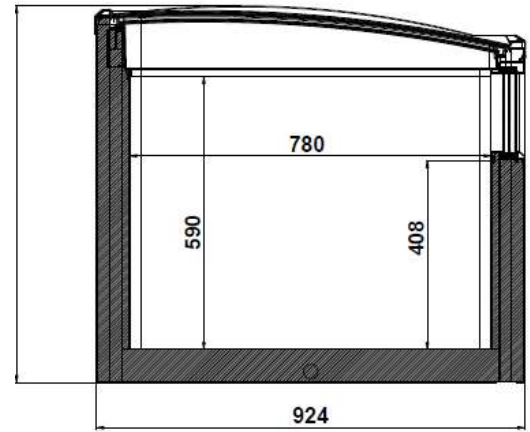

APPLE FG BLACK



- Temperature Range	NTS: -18/-23 C°
- External Dimensions (WXDXH)	2008*932*894
- Internal Dimensions (WXDXH)	1860 * 780 * 590
External Dimensions with Package (WXDXH)	2115 * 1035 * 940
Net Volume (Lt)	512
Gross Volume (Lt)	941
- Product food Area (m²)	1,87 m²
- Net Weight (kg)	144
- Gross Weight (kg)	166
- Refrigerant Gass	R404 / R290(OPT)
- Voltage / Frequency	220 V / 50-60 Hz
- Thermostat Type	ELEKTRONIC
- Frame Resistance	HOT GASS
Defrost	OPTIONAL
- Adjustable Leg	YES 4 PCS
- Internal Illumination	LED
Cabinet Outer Sheet Type	Galvanized & Pre-painted Metal Sheet
Cabinet Inner sheet type	Galvanized & Pre-painted Metal Sheet
- Insulation Material	Polyurethane
PU Thickness	72 mm

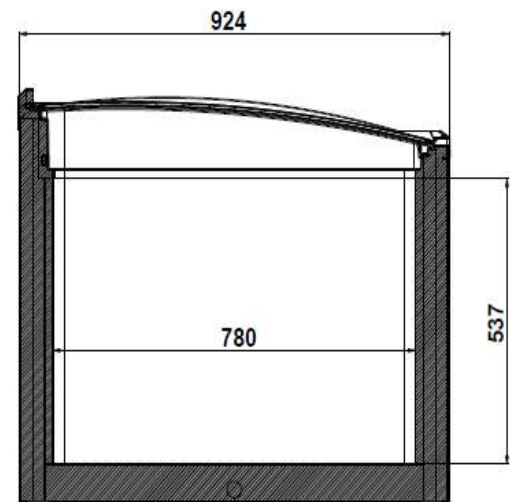

APPLE HEAD



- Temperature Range	NTS: -18/-23 C° - PTS: -1/+5 C°
- External Dimensions (WXDXH)	2008*932*894
- Internal Dimensions (WXDXH)	1860 * 780 * 537
External Dimensions with Package (WXDXH)	2115 * 1035 * 940
Net Volume (Lt)	620
Gross Volume (Lt)	864
- Product food Area (m²)	1,87 m²
Net Weight (kg)	132
Gross Weight (kg)	155
- Refrigerant Gass	R404 / R290(OP)
- Voltage / Frequency	220 V / 50-60 Hz
- Thermostat Type	ELEKTRONIC
- Frame Resistance	HOT GASS
Defrost	OPTIONAL
- Adjustable Leg	x4
- Internal Lightening	LED
Cabinet Outer Sheet Type	Galvanized & Pre-painted Metal Sheet
Cabinet Inner sheet type	Galvanized & Pre-painted Metal Sheet
- Insulation Material	Polyurethane
PU Thickness	72 mm



KIWI SERIES











KIWI 630

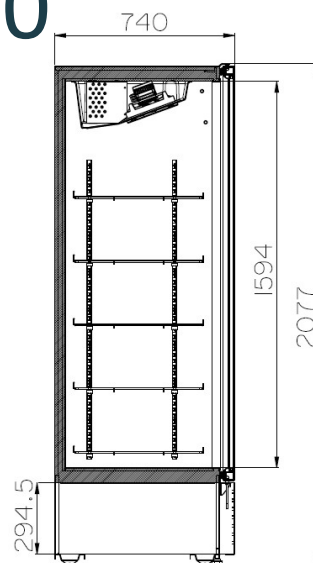


-Temperature Range	+1/+10 C°
- External Dimensions (WxDxH)	630 X 740 X 2077
- Internal Dimensions (WXDXH)	544 X 638 X 1594
- Packed Dimensions (WXDXH)	640 X 765 X 2167
- Net Volume (Lt)	510
- Gross Volume (Lt)	558
- Product Projection Area (m ²)	0,46 m ²
- Net Weight (kg)	135
- Gross Weight (kg)	145
- Refrigerant Gass	R404 / R290
- Voltage / Frequency	220 V / 50-60 Hz
- Thermostat Type	Electronic
- Adjustable Leg	2 pcs in front
- Wheel	Roller x 4 (Standard) Movable Roller x 4 (Optional)
- Lightening	LED
- External Body Sheet	Pre-painted
- Internal Body Sheet	Pre-painted
- Insulation	Polyurethane
- Polyurethane Thickness	43 mm
- Glass Type	Double Tempered Low-E
- Frame Type (Optional)	Frameless
- Door Lightening	Optional

KIWI 1270

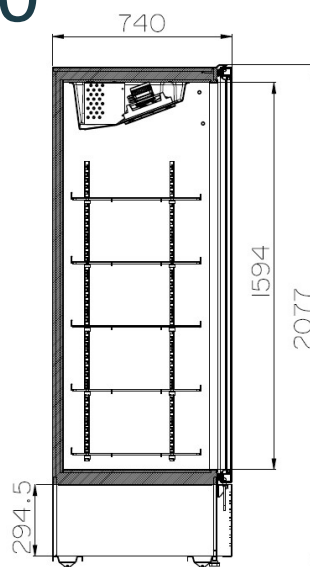


- Temperature Range	+1/+10 C°
- External Dimensions (WxDxH)	1270 X 740 X 2077
- Internal Dimensions (WDXH)	1184 X 638 X 1594
- Packed Dimensions (WDXH)	1280 X 765 X 2167
- Net Volume (Lt)	1095
-Gross Volume (Lt)	1215
- Product Projection Area (m²)	0,93 m²
-Net Weight (kg)	160
- Gross Weight (kg)	175
- Refrigerant Gass	R404 / R290
- Frequency	220 V / 50-60 Hz
- Thermostat Type	Electronic
- Adjustable Leg	2 pcs in front
- Wheel	Roller x 4 (Standard) Movable Roller x 4 (Optional)
-Lightening	LED
- External Body Sheet	Pre-painted
- Internal Body Sheet	Pre-painted
- Insulation	Polyurethane
- Polyurethane Thickness	43 mm
- Glass Type	Double Tempered Low-E
- Frame Type (Optional)	Frameless
- Door Lightening	Optional

KIWI 1620 XL 2 DOOR

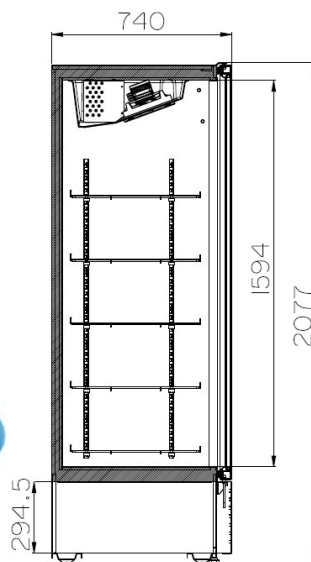

- Temperature Range	+1/+10 C°
- External Dimensions (WxDxH)	1620 x 740 x 2077
- Internal Dimensions (WXDXH)	1534 x 638 x 1594
- Packed Dimensions (WXDXH)	1630 x 765 x 2167
- Net Volume (Lt)	1430
- Gross Volume (Lt)	1574
- Product Projection Area (m²)	1,20 m²
- Net Weight (kg)	230
- Gross Weight (kg)	245
- Refrigerant Gass	R404 / R290
- Voltage / Frequency	220 V / 50-60 Hz
- Thermostat Type	Electronic
- Adjustable Leg	2 pcs in front
- Wheel	Roller x 4 (Standard) Movable Roller x 4 (Optional)
- Lightening	LED
- External Body Sheet	Pre-painted
- Internal Body Sheet	Pre-painted
- Insulation	Polyurethane
- Polyurethane Thickness	43 mm
- Glass Type	Double Tempered Low-E
- Frame Type (Optional)	Frameless
- Door Lightening	Optional

KIWI 1620 XL 3DOOR

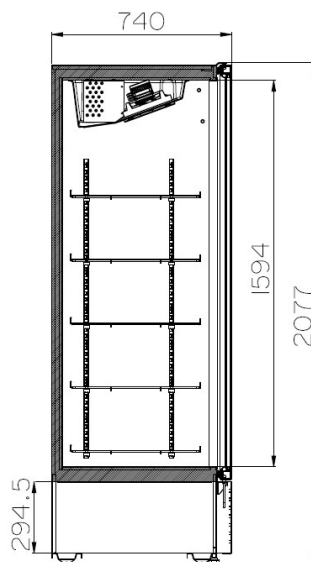

- Temperature Range	+1/+10 C°
- External Dimensions (WxDxH)	1620 x 740 x 2077
- Internal Dimensions (WXDXH)	1534 x 638 x 1594
- Packed Dimensions (WXDXH)	1630 x 765 x 2167
- Net Volume (Lt)	1432
- Gross Volume (Lt)	1560
- Product Projection Area (m ²)	1,20 m ²
- Net Weight (kg)	245
- Gross Weight (kg)	265
- Refrigerant Gass	R404 / R290
- Voltage / Frequency	220 V / 50-60 Hz
- Thermostat Type	Electronic
- Adjustable Leg	2 pcs in front
- Wheel	Roller x 4 (Standard) Movable Roller x 4 (Optional)
- Lightening	LED
- External Body Sheet	Pre-painted
- Internal Body Sheet	Pre-painted
- Insulation	Polyurethane
-Polyurethane Thickness	43 mm
- Glass Type	Double Tempered Low-E
- Frame Type (Optional)	Frameless
- Door Lightening	Optional

*Sizin için
taze bir
gelecek...*





MEMBER OF



LEMON SERIES




Lemon 455

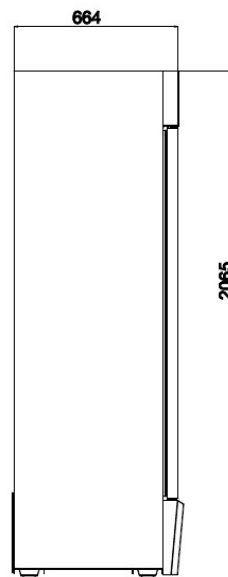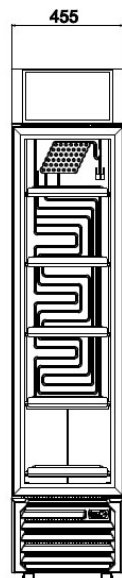


- Temperature Range	+1/+10 C°
- External Dimensions (WxDxH)	455 X 664 X 2065
- Internal Dimensions (WXDXH)	369 x 558 x 1629
- Packed Dimensions (WXDXH)	465 x 694 x 2175
- Net Volume (Lt)	306
- Gross Volume (Lt)	330
- Refrigerant Gass	R404 / R290 / R600
- Frequency	220 V / 50-60 Hz
- Thermostat Type	Electronic
- Adjustable Leg	2 pcs in front
- Wheel	Roller x 4 (Standard)
- Lightening	LED
- External Body Sheet	Galvanized & Pre-painted Metal Sheet
- Internal Body Sheet	Galvanized & Pre-painted Metal Sheet
- Insulation	Polyurethane
- Polyurethane Thickness	43 mm
- Glass Type	Double Tempered Low-E
- Frame Type (Optional)	Aluminium Frame
- Door Lightening	Optional

LEMON 600

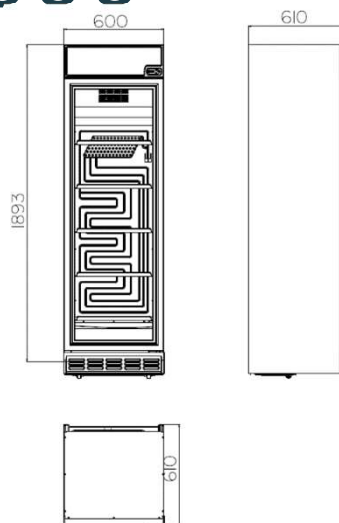

- Temperature Range	+1/+10 C°
- External Dimensions (WxDxH)	600 X 610 X 1893
- Internal Dimensions (WXDXH)	510 X 470 X 1560
- Packed Dimensions (WXDXH)	610 X 630 X 2020
- Net Volume (Lt)	337
- Gross Volume (Lt)	386
- Net Weight (kg)	93
- Gross Weight (kg)	100
- Product Projection Area	0,37 m ²
- Refrigerant Gass	R404 / R290 / R600
- Voltage / Frequency	220 V / 50-60 Hz
- Thermostat Type	Electronic
- Adjustable Leg	2 pcs in front
- Wheel	Roller x 4 (Standard) Movable Roller x 4 (Optional)
- Lightening	LED
External Body Sheet	Galvanized & Pre-painted Metal Sheet
- Internal Body Sheet	Galvanized & Pre-painted Metal Sheet
- Insulation	Polyurethane
- Polyurethane Thickness	43 mm
- Glass Type	Double Tempered Low-E
- Frame Type (Optional)	Aluminium Frame
- Door Lightening	Optional


LEMON 805

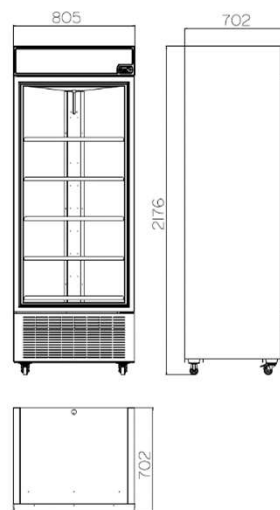

+1/+10 C°


- Temperature Range	+1/+10 C°
- External Dimensions (WxDxH)	805 X 702 X 2176
- Internal Dimensions (WDXH)	714 X 595 X 1674
- Packed Dimensions (WDXH)	815 X 722 X 2258
- Net Volume (Lt)	654
- Gross Volume (Lt)	711
- Net Weight (kg)	132
- Gross Weight (kg)	141
- Product Projection Area	0,57 m ²
- Refrigerant Gass	R404 / R290
- Voltage / Frequency	220 V / 50-60 Hz
- Thermostat Type	Electronic
- Adjustable Leg	2 pcs in front
- Wheel	Roller x 4 (Standard) Movable Roller x 4 (Optional)
- Lightening	LED
- External Body Sheet	Galvanized & Pre-painted Metal Sheet
- Internal Body Sheet	Galvanized & Pre-painted Metal Sheet
- Insulation	Polyurethane
-Polyurethane Thickness	43 mm
- Glass Type	Double Tempered Low-E
- Frame Type (Optional)	Aluminium Frame
- Door Lightening	Optional

LEMON 1505 2D

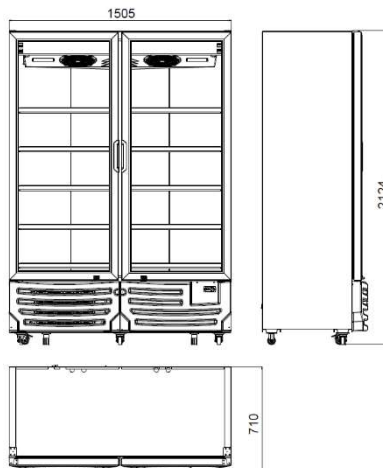

- Temperature Range	+1/+10 C°
- External Dimensions (WxDxH)	1505X710X2124
- Internal Dimensions (WXDXH)	1414X564X1594
Packed Dimensions (WXDXH)	1515X740X2245
- Net Volume (Lt)	1152
- Gross Volume (Lt)	1271
- Net Weight (kg)	215
- Gross Weight (kg)	227
- Product Projection Area	1,07 m ²
- Refrigerant Gass	R404 / R290
- Voltage / Frequency	220 V / 50-60 Hz
- Thermostat Type	Electronic
- Adjustable Leg	2 pcs in front
- Wheel	Roller x 4 (Standard) Movable Roller x 4 (Optional)
- Lightening	LED
External Body Sheet	Galvanized & Pre-painted Metal Sheet
- Internal Body Sheet	Galvanized & Pre-painted Metal Sheet
- Insulation	Polyurethane
- Polyurethane Thickness	43 mm
- Glass Type	Double Tempered Low-E
- Frame Type (Optional)	Frameless Plastic Frame Aluminium Frame
- Door Lightening	Optional

LEMON 1505 3D

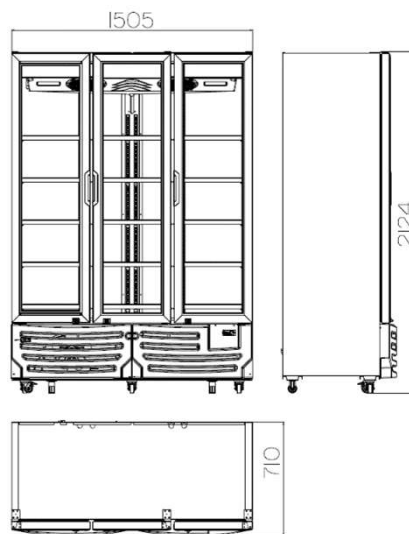

+1/+10 C°

- Temperature Range	
- External Dimensions (WxDxH)	1505X710X2124
- Internal Dimensions (WXDXH)	1414X564X1594
- Packed Dimensions (WXDXH)	1515X740X2245
- Net Volume (Lt)	1152
- Gross Volume (Lt)	1271
- Net Weight (kg)	222
- Gross Weight (kg)	234
- Product Projection Area	1,07 m ²
- Refrigerant Gass	R404 / R290
- Voltage / Frequency	220 V / 50-60 Hz
- Thermostat Type	Electronic
- Adjustable Leg	2 pcs in front
- Wheel	Roller x 4 (Standard) Movable Roller x 4 (Optional)
- Lightening	LED
- External Body Sheet	Galvanized & Pre-painted Metal Sheet
- Internal Body Sheet	Galvanized & Pre-painted Metal Sheet
- Insulation	Polyurethane
- Polyurethane Thickness	43 mm
- Glass Type	Double Tempered Low-E
- Frame Type (Optional)	Frameless Plastic Frame Aluminium Frame
- Door Lightening	Optional



Single Doors





Full Door




Front Bar



Canopy

Eco600

ECO 600

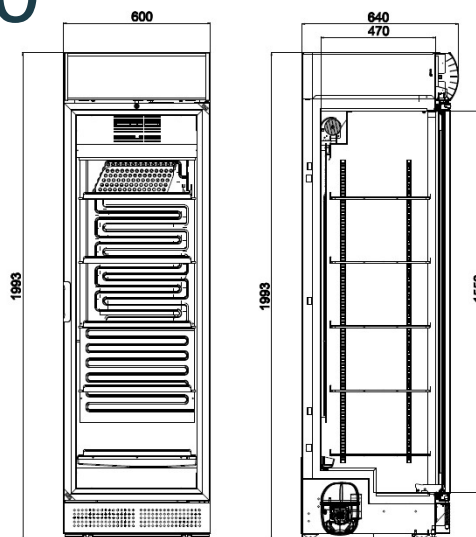


Temperature Range

+1/+10 C°

External Dimensions (WxDxH)	600 X 610 X 1893
Internal Dimensions (WXDXH)	510 X 470 X 1560
Packed Dimensions (WXDXH)	610 X 630 X 2020
Net Volume (Lt)	337
Gross Volume (Lt)	386
Net Weight (kg)	93
Gross Weight (kg)	100
Product Projection Area	0,37 m ²
Refrigerant Gass	R600
Voltage / Frequency	220 V / 50-60 Hz
Thermostat Type	Mechanical
Adjustable Leg	2 pcs in front
Wheel	Roller x 4
Lightening	LED on top
External Body Sheet	Pre-painted & galvanized metal sheet
Internal Body Sheet	Pre-painted & galvanized metal sheet
Insulation	Polyurethane
PPolyurethane Thickness	43 mm
Glass Type	Double Tempered
Door Frame Type	Plastic Frame
Door lock	Optional
Shelves	4+Base

ECO 600 FD

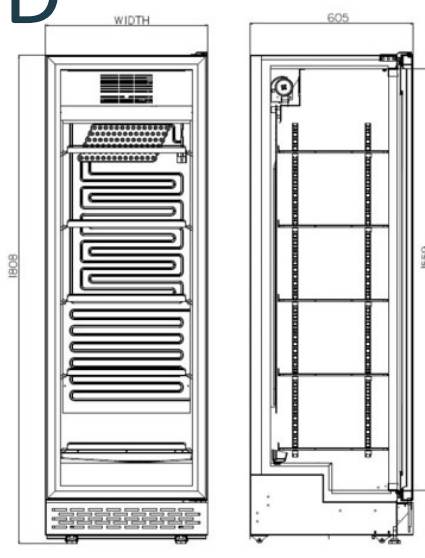

- Temperature Range

+1/+10 C°

- External Dimensions (WxDxH)

600 X 605X 1809

- Internal Dimensions (WXDXH)

510 X 470 X 1560

- Packed Dimensions (WXDXH)

610 X 615X 1936

- Net Volume (Lt)

337

- Gross Volume (Lt)

386

- Net Weight (kg)

93

- Gross Weight (kg)

100

- Product Projection Area

0,37 m²

- Refrigerant Gass

R404 / R290 / R600

- Voltage / Frequency

220 V / 50-60 Hz

- Thermostat Type

Mecanical

- Adjustable Leg

2 pcs in front

- Wheel

Roller x 4 (Standard)

- Lightening

LED on top

External Body Sheet

DKP sheet + powder painted

- Internal Body Sheet

Pre-painted

- Insulation

Polyurethane

- Polyurethane Thickness

43 mm


- Glass Type

Double Tempered

- Door lock

Optional

ECO 600 Front Bar

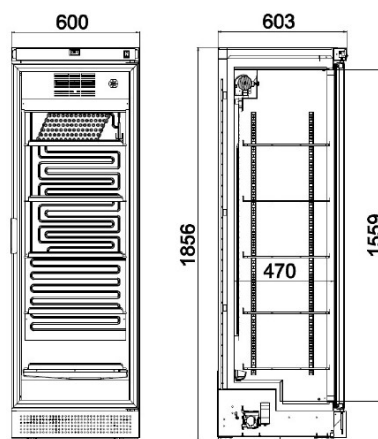

- Temperature Range	+1/+10 C°
- External Dimensions (WxDxH)	600 X 603 X 1856
- Internal Dimensions (WXDXH)	510 X 470 X 1560
- Packed Dimensions (WXDXH)	610 X 630 X 2000
- Net Volume (Lt)	337
- Gross Volume (Lt)	386
- Net Weight (kg)	93
- Gross Weight (kg)	100
- Product Projection Area	0,37 m ²
- Refrigerant Gass	R404 / R290 / R600
- Voltage / Frequency	220 V / 50-60 Hz
- Thermostat Type	Mecanical
- Adjustable Leg	2 pcs in front
- Wheel	Roller x 4 (Standard)
- Lightening	LED on top-
- External Body Sheet	Galvanised & Pre-painted metal sheet
- Internal Body Sheet	Galvanised & Pre-painted metal sheet
- Insulation	Polyurethane
- Polyurethane Thickness	43 mm
- Glass Type	Double Tempered
- Frame Type	Plastic Door frame
- Door lock	Optional




Full Door with Step

Full Door

Full Door With Canopy

Wide Single Doors



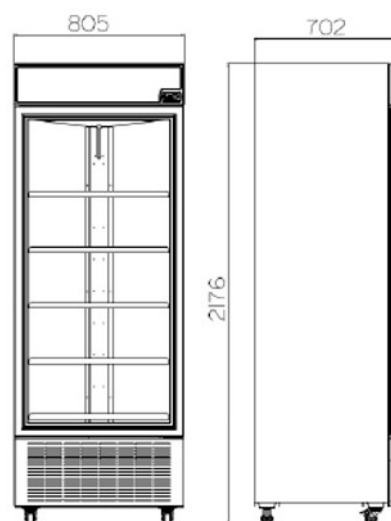

+1/+10 C°

- Temperature Range

- External Dimensions (WxDxH)

805 X 702 X 2176

- Internal Dimensions (WXDXH)

714 X 595 X 1674

- Packed Dimensions (WXDXH)

815 X 722 X 2258

- Net Volume (Lt)

654

- Gross Volume (Lt)

711

- Net Weight (kg)

132

- Gross Weight (kg)

141

- Product Projection Area

0,57 m²

- Refrigerant Gass

R404 / R290

- Voltage / Frequency

220 V / 50-60 Hz

- Thermostat Type

Electronic

- Adjustable Leg

2 pcs in front

- Wheel

Roller x 4 (Standard)
Movable Roller x 4 (Optional)

- Lightening

LED

External Body Sheet

Galvanized & Pre-painted Metal Sheet

- Internal Body Sheet

Galvanized & Pre-painted Metal Sheet

- Insulation

Polyurethane

- Polyurethane Thickness

43 mm

- Glass Type


Double Tempered
Low-E

- Frame Type (Optional)

Aluminium Frame


- Door Lightening

Optional

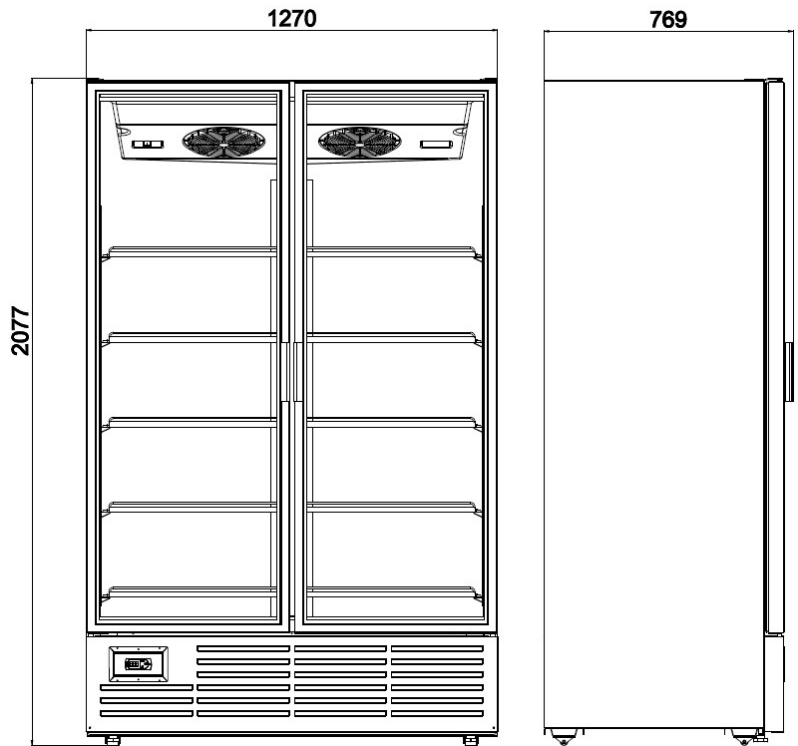

Eco1270=Double Door



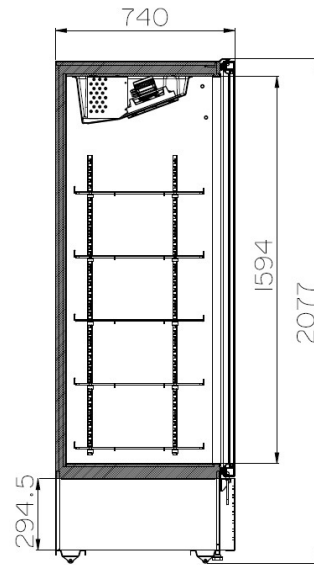

Temperature Range	+1/+10 C°
External Dimensions (WxDxH)	1270 X 740 X 2077
Internal Dimensions (WDXH)	1184 X 638 X 1594
Packed Dimensions (WDXH)	1280 X 765 X 2167
Net Volume (Lt)	1095
Gross Volume (Lt)	1215
Product Projection Area (m²)	0,93 m²
Net Weight (kg)	160
Gross Weight (kg)	175
Refrigerant Gass	R290
Voltage / Frequency	220 V / 50-60 Hz
Thermostat Type	Mechanical
Adjustable Leg	2 pcs in front
Wheel	Roller x 4
Lightening	LED on top + right + left
External Body Sheet	Pre-painted & galvanized metal sheet
Internal Body Sheet	Pre-painted & galvanized metal sheet
Insulation	Poliüretan / Polyurethane
Polyurethane Thickness	43 mm
Glass Type	Double Tempered
Door Frame Type	Plastic
Shelves	4+Base

✓ *Eco1270 with Canopy*





Eco1505 2d & 3d





Eco 1505 2d or 3d





Temperature Range	+1/+10 C°
External Dimensions (WxDxH)	1505X710X2124
Internal Dimensions (WXDXH)	1414X564X1594
Packed Dimensions (WXDXH)	1515X740X2245
Net Volume (Lt)	1152
Gross Volume (Lt)	1271
Net Weight (kg)	222
Gross Weight (kg)	234
Product Projection Area	1,07 m ²
Refrigerant Gass	R404
Voltage / Frequency	220 V / 50-60 Hz
Thermostat Type	Electronic
Adjustable Leg	2 pcs in front
Wheel	Roller x 4 (Standard) Movable Roller x 4 (Optional)
Lightening	LED
External Body Sheet	Galvanised & Pre-painted metal sheet
Internal Body Sheet	Galvanised & Pre-painted metal sheet
Insulation	Polyurethane
Polyurethane Thickness	43 mm
Glass Type	Double Tempered Low-E
Frame Type (Optional)	Aluminium Frame
Powder Paint thickness	60-80 micron



Backbar & Mini



BackBar

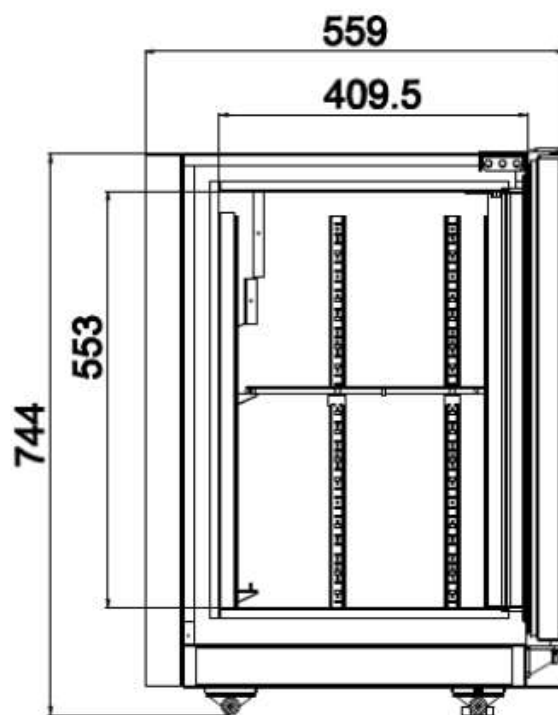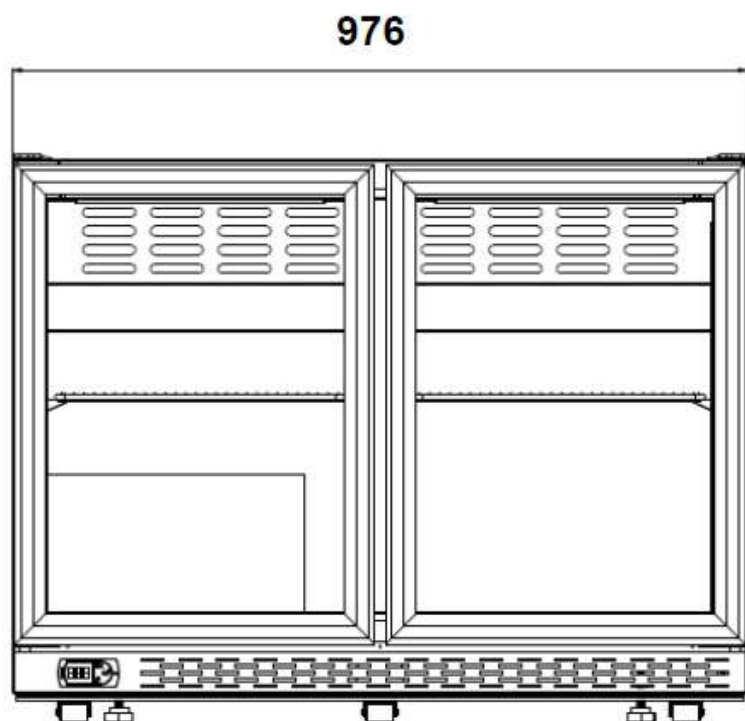

Müni



- Temperature Range	NTS:+1/+10 C°
- External Dimensions (WxDxH)	500 X 481,5 X 725,5
- Internal Dimensions (WXDXH)	422 X 308 X 526
Packed Dimensions (WXDXH)	510 X 510 X 765
- Net Volume (Lt)	51
-Gross Volume (Lt)	55
- Product Projection Area (m²)	0,24 m²
-Net Weight (kg)	-
- Gross Weight (kg)	-
- Refrigerant Gass	R404
- Frequency	220 V / 50-60 Hz
- Thermostat Type	Electronic
- Adjustable Leg	4
- Internal Lightening	LED
-Cabinet Outer Sheet Type	Prepainted Sheet
- Cabinet Inner Sheet Type	Prepainted Sheet
- Internal Body Sheet	Pre-painted
- Insulation	Polyurethane
- Polyurethane Thickness	39mm

Special Designs



Special Designs



Special Designs



Special Designs





EN ISO 9001:2015



IMRO COOL SOLUTIONS SRL

Calea Stan Vidrighin nr. 14, Timisoara, Romania

Mobil: 0040 753 069 110. E-mail: imro@imrosolutions.com